

# TopTank

## Mobile Tanker Access System

ifcinflow



Meets all Health and Safety requirements for  
Operator Safety When Working At Height

Our newly redesigned TopTank system is one of our mobile fall prevention solutions. It allows you to safely access the tops of road and rail tankers, and ISO containers without the need for fixed gantries, fall arrest harnesses or relying on inbuilt tanker railings.

### Features and Benefits

- Robust aluminium safety cage provides collective Fall Prevention solution.
- Designed to fit anywhere along the length of the tanker.
- Lightweight, easy to move and operate by one person.
- Height adjustable system to fit all tanker sizes.
- Quick and easy to assemble.
- A range of cage sizes and shapes for different tanker configurations.

### Uses include

- Road tanker servicing and maintenance.
- Trailer roof access for cleaning and maintenance.
- ISO container access for maintenance.
- Product sampling.
- Batch testing and checking.
- Tank vent access.

### Safety by Design

ifcinflow

Unit 3 Ryder Way  
Basildon  
Essex SS13 1QH

ifcinflow.com  
+44 (0) 1268 596 900  
sales@ifcinflow.com

## Cage Options

Type- Standard	Size
Standard 2 Rail Cage	1.5m W x 0.5m H x 1.5m L
Standard 3 Rail Cage	1.5m W x 1m H x 1.5m L
Standard 3 Rail Cage +Angled Bottom Rail	1.5m W x 1m H x 1.5m L

Type- Large	Size
Large 2 Rail Cage	1.5m W x 0.5m H x 2.5m L
Large 3 Rail Cage	1.5m W x 1m H x 2.5m L
Large 3 Rail Cage +Angled Bottom Rail	1.5m W x 1m H x 2.5m L

## TopTank Technical Data

### Materials

- Non-corroding aluminum access ladder, upper platform and safety cage.
- Hot dip galvanised mild steel frame.

### Dimensions



- Extended 750mm non-slip upper walkway & lower access deck.
- Platform height: 2800mm - 4200mm above ground level.

### Stability

- Rear brake wheel diameter: 200mm
- Front pneumatic tyre diameter: 300mm
- HD galvanised screw jacks

## Operation

- Easy to move into position by a single operator and does not require the additional use of towing or trolley equipment
- Safety cage is raised and lowered with a simple winch
- Safety ladder is locked into position with a chain operated ladder latch & lock mechanism.
- Once in position, TopTank is parked using secure locking castor wheels and levelling screw jacks.

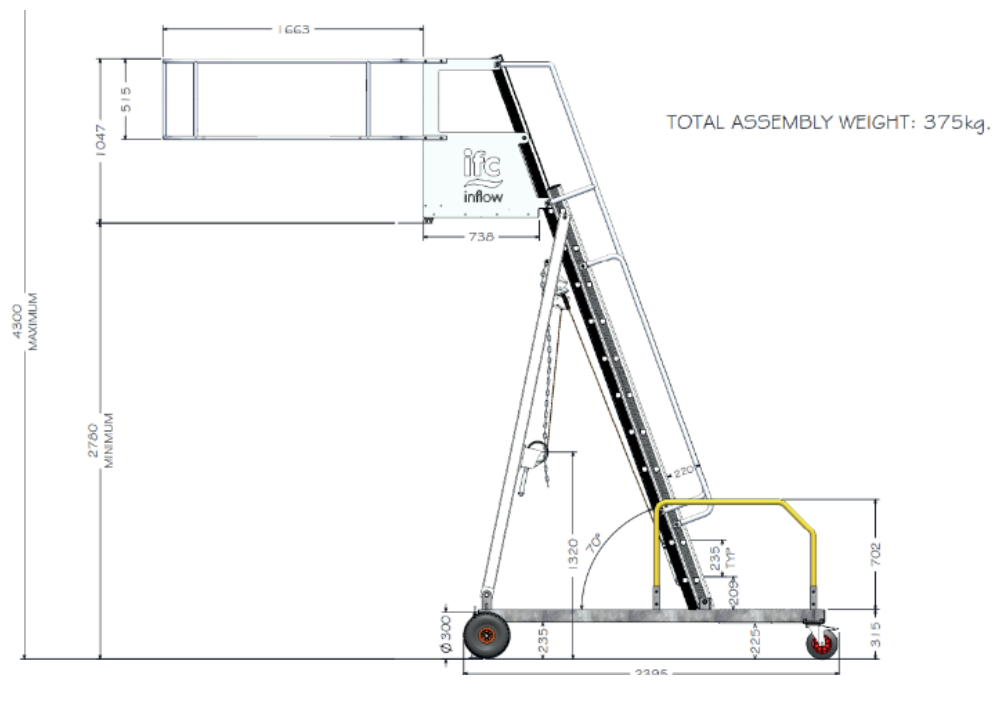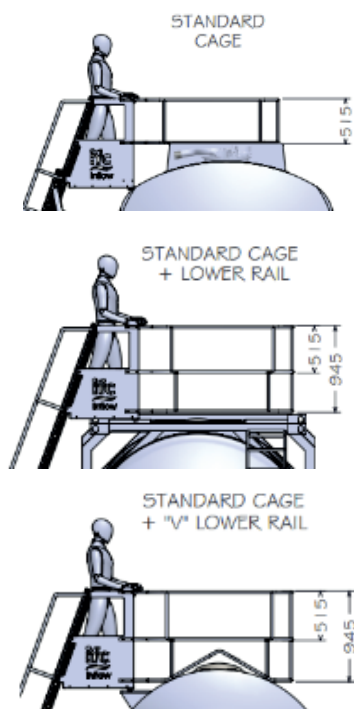

**ifc**inflow

Safety by Design

Unit 3 Ryder Way  
Basildon  
Essex SS13 1QH

ifcflow.com  
+44 (0) 1268 596 900  
sales@ifcflow.com

nqa  
ISO 9001  
Registered  
Quality  
Management

UKAS  
MANAGEMENT  
SYSTEMS  
015

